

# LED Gas Station Canopy Light

3-Wattages + 3-CCT , Wet Rated, 135 lm/W, Dimmable

## FEATURES

Lumen Output	12150-20250 lumens
Efficacy	135 lm/W
Input Voltage	120-277V
Dimmable	0-10V Continuous
CCT	Select (4500K, 5000K, 5700K)
Rating	Wet Location
Warranty	5 Years

## APPLICATIONS

Premium outdoor luminaire for surface mounting in ceiling spaces less than 25 feet. Suitable for gas station canopies.

## CONSTRUCTION

Manufactured for weather-proof durability using solid heavy duty die cast aluminum housing with anti-UV polyester coating to resist water, salt, corrosion, discoloration, and scratching. Wet Location rated.

## ELECTRICAL

Input voltages 120-277V with 0-10V Continuous Dimming. Tunable 3-wattage (90W 120W 150W) and tunable 3-CCT(40K 50K 57K). Operating temperatures -40°F to 113°F (-40°C to 45°C).

## MOUNTING

Surface mounted installation. Includes a 6-Inch 5 core, 18AWG wiring cable.

## OPTICS

Anti-UV Clear Glass Lens for 110° Beam Angle.

## LISTINGS

DLC Premium listed. UL certified to meet US and Canadian standards. FCC and RoHS compliant.

## WARRANTY

5 year exclusive limited warranty.

150W Max Models




## CORRELATED COLOR TEMPERATURE (CCT)

3-CCT (40K, 50K, 57K)



## PHYSICAL DIMENSIONS

All Models 16.54"L x 16.54"W x 2.64"H

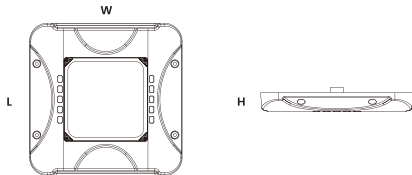

## SPECIFICATIONS

### ENERGY DATA

Input Voltage: 120-277V

Input Frequency: 50/60 Hz

Wattage: 3-wattage (150W max )

Power Factor: >0.9

Total Harmonic Distortion (THD): <15%

Operating Temperature: -40°F to 113°F (-40°C to 45°C)

### LIGHTING DATA

Lumens: 12150-20250

Lumens Per Watt: 135 lm/W

Correlated Color Temperature (CCT): 3-CCT (40K, 50K, 57K)

Dimmable: 0-10V

Color Rendering Index (CRI): >70

L70: 50000 hours

## ORDERING INFORMATION

Model	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions
GS01-150/120/90W-LV-3CCT	150W max	120-277V	1.38A@120V, 0.60A@277V	20250 max	135 lm/W	40/50/57K	0-10V	White	16.54"L x 16.54"W x 2.64"H