

C2 LED Post Top Lantern

3-Wattages + 3-CCT (30/40/50K), Wet Rated, 120lm/W, Dimmable

FEATURES	
Lumen Output	3600 to 7200 lumens
Efficacy	120 lm/W
Input Voltage	120-277V
Dimmable	0-10V Continuous
CCT	Select (3000K, 4000K, 5000K)
Rating	Wet Location
Warranty	5 Years

APPLICATIONS
Premium outdoor luminaire suitable for entrances, building exteriors, parks, and pedestrian walkways.

CONSTRUCTION
Manufactured for weather-proof durability using solid heavy duty die cast aluminum housing with anti-UV polyester coating to resist water, salt, corrosion, discoloration, and scratching. Wet Location rated.

ELECTRICAL
Input voltages 120-277V models with 0-10V Continuous Dimming. Tunable 3-CCT (3000K, 4000K, 5000K), and Tunable 3-Wattage models(30W 50W 60W). Operating temperatures -40°F to 113°F (-40°C to 45°C).

MOUNTING
Includes 3-inch Slip-Fit Pole Mounting base.

OPTICS
Anti-UV Frosted Tempered Glass IES/ NEMA Type 5 Lens.

CONTROLS
NEMA 3-Pin Photocell Sensor optional.

LISTINGS
DLC listed. UL certified to meet US and Canadian standards. FCC and RoHS compliant.

WARRANTY
5 year exclusive limited warranty.


3-CCT and Tunable 60W Max Models ,Photocell Sensor Optional



Photocell Sensor Optional



TUNABLE CORRELATED COLOR TEMPERATURES (CCT)

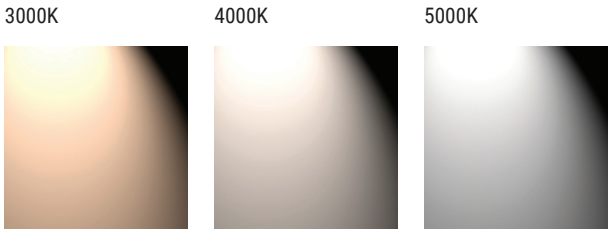

SPECIFICATIONS

ENERGY DATA

Input Voltage: 120-277V

Input Frequency: 50/60 Hz

Wattage: 3-Wattages (30W,50W,60W)

Power Factor: >0.9

Total Harmonic Distortion (THD): <15%

Operating Temperature: -40°F to 113°F (-40°C to 45°C)

LIGHTING DATA

Lumens: 3300 to 6600

Lumens Per Watt: 120 lm/W

Correlated Color Temperature (CCT): 3-CCT (30K, 40K, 50K)

Dimmable: 0-10V

Color Rendering Index (CRI): >70

L70: 50000 hours

ORDERING INFORMATION

Model	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions
C2-PT-60W-X-MTCP	(30W, 50W, 60W)	120-277V	0.28A@120V, 0.12A@277V 0.47A@120V, 0.20A@277V 0.55A@120V, 0.24A@277V	3600 6000 7200	120lm/W	(3000K, 4000K, 5000K)	0-10V	Black	13.80"L x 13.80"W x 24.92"H

"X" can be "Blank" for none photocell ,or "P" for photocell

PHYSICAL DIMENSIONS

All Models

13.80"L x 13.80"W x 24.92"H

