

C4 Round LED Post Top

3-CCT (30/40/50K) or Fixed 5000K, Wet Rated, 130lm/W, Dimmable

FEATURES	
Lumen Output	7800 to 26000 lumens
Efficacy	130 lm/W
Input Voltage	120-277V
Dimmable	0-10V Continuous
CCT	5000K or Select (3000K, 4000K, 5000K)
Rating	Wet Location
Warranty	5 Years

APPLICATIONS

Premium outdoor luminaire suitable for entrances, building exteriors, parks, and pedestrian walkways.

CONSTRUCTION

Manufactured for weather-proof durability using solid heavy duty die cast aluminum housing with anti-UV polyester coating to resist water, salt, corrosion, discoloration, and scratching. Wet Location rated.

ELECTRICAL

Input voltages 120-277V models with 0-10V Continuous Dimming. Tunable 3-CCT (3000K, 4000K, 5000K) or Fix 5000K. Operating temperatures -40°F to 113°F (-40°C to 45°C)

MOUNTING

Includes 3-inch Slip-Fit Pole Mounting base.

LENS

Anti-UV Frosted PC Lens.

CONTROLS

Built-in Photocell Sensor Pre-installed.

LISTINGS

DLC listed. UL certified to meet US and Canadian standards. RoHS compliant.

WARRANTY


5 year exclusive limited warranty.



PHOTOCELL SWITCH



TUNABLE CORRELATED COLOR TEMPERATURES (CCT)

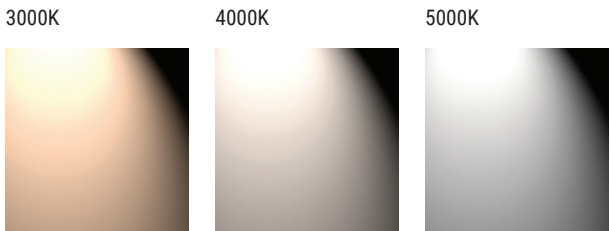

SPECIFICATIONS

ENERGY DATA

Input Voltage: 120-277V

Input Frequency: 50/60 Hz

Wattage: (60W,80W,100W,120W,150W,200W)

Power Factor: >0.9

Total Harmonic Distortion (THD): <15%

Operating Temperature: -40°F to 113°F (-40°C to 45°C)

LIGHTING DATA

Lumens: 7800 to 26000

Lumens Per Watt: 130 lm/W

Correlated Color Temperature (CCT): 3-CCT (30K, 40K, 50K) or Fixed 50K

Dimmable: 0-10V


Color Rendering Index (CRI): >70

L70: 50000 hours


ORDERING INFORMATION

Model	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions
C4-PT-60W-MTC	60W	120-277V	0.56A@120V, 0.24A@277V	7800	130lm/W	(3000K, 4000K, 5000K)	0-10V	Black	ø 12.44"C x 6.97"H
C4-PT-80W-MTC	80W	120-277V	0.74A@120V, 0.32A@277V	10400	130lm/W	(3000K, 4000K, 5000K)	0-10V	Black	ø 12.44"C x 6.97"H
C4-PT-100W-MTC	100W	120-277V	0.92A@120V, 0.40A@277V	13000	130lm/W	(3000K, 4000K, 5000K)	0-10V	Black	ø 12.44"C x 6.97"H
C4-PT-120W-MTC	120W	120-277V	1.11A@120V, 0.48A@277V	15600	130lm/W	(3000K, 4000K, 5000K)	0-10V	Black	ø 12.44"C x 6.97"H
C4-PT-150W-MTC	150W	120-277V	1.39A@120V, 0.60A@277V	19500	130lm/W	(3000K, 4000K, 5000K)	0-10V	Black	ø 16.54"C x 7.60"H
C4-PT-200W-MTC	200W	120-277V	1.85A@120V, 0.80A@277V	26000	130lm/W	(3000K, 4000K, 5000K)	0-10V	Black	ø 16.54"C x 7.60"H
C4-PT-60W-50K	60W	120-277V	0.56A@120V, 0.24A@277V	7800	130lm/W	5000K	0-10V	Black	ø 12.44"C x 6.97"H
C4-PT-80W-50K	80W	120-277V	0.74A@120V, 0.32A@277V	10400	130lm/W	5000K	0-10V	Black	ø 12.44"C x 6.97"H
C4-PT-100W-50K	100W	120-277V	0.92A@120V, 0.40A@277V	13000	130lm/W	5000K	0-10V	Black	ø 12.44"C x 6.97"H
C4-PT-120W-50K	120W	120-277V	1.11A@120V, 0.48A@277V	15600	130lm/W	5000K	0-10V	Black	ø 12.44"C x 6.97"H
C4-PT-150W-50K	150W	120-277V	1.39A@120V, 0.60A@277V	19500	130lm/W	5000K	0-10V	Black	ø 16.54"C x 7.60"H
C4-PT-200W-50K	200W	120-277V	1.85A@120V, 0.80A@277V	26000	130lm/W	5000K	0-10V	Black	ø 16.54"C x 7.60"H

PHYSICAL DIMENSIONS

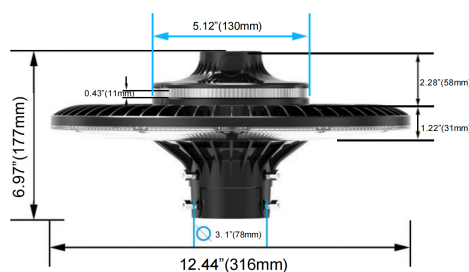

60~120W

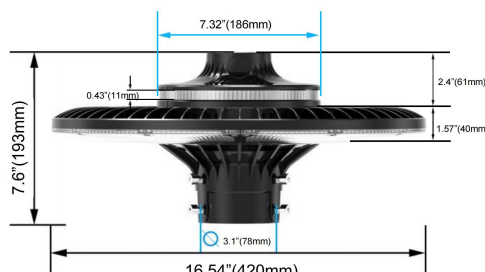

150~200W

