

LED Post Top Light

3-Wattages + 3-CCT (30/40/50K), Wet Rated, 140 lm/W, Dimmable

FEATURES	
Lumen Output	5000 to 21000 lumens
Efficacy	140 lm/W
Input Voltage	120-277V
Dimmable	0-10V Continuous
CCT	Select (3000K, 4000K, 5000K)
Rating	Wet Location
Warranty	5 Years

APPLICATIONS

Premium outdoor luminaire suitable for entrances, building exteriors, parks, and pedestrian walkways.

CONSTRUCTION

Manufactured for weather-proof durability using solid heavy duty die cast aluminum housing with anti-UV polyester coating to resist water, salt, corrosion, discoloration, and scratching. Wet Location rated.

ELECTRICAL

Input voltages 120-277V models with 0-10V Continuous Dimming. Tunable 3-CCT (3000K, 4000K, 5000K) and 3-Wattage models. Operating temperatures -40°F to 113°F (-40°C to 45°C).

MOUNTING

Includes 3-inch Slip-Fit Pole Mounting base.

OPTICS

Anti-UV Clear Polycarbonate IES/ NEMA Type 5 Lens.

LISTINGS

DLC Premium listed. UL certified to meet US and Canadian standards. FCC and RoHS compliant.


WARRANTY

5 year exclusive limited warranty.

Tunable 60W Max ,80W Max, 100W Max ,150W Max Models



TUNABLE CORRELATED COLOR TEMPERATURES (CCT)

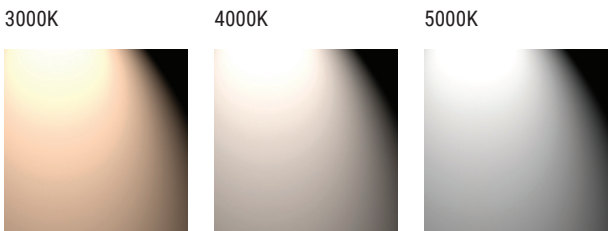

SPECIFICATIONS

ENERGY DATA

- Input Voltage: 120-277V
- Input Frequency: 50/60 Hz
- Wattage: 3-Wattages (60W Max, 80W Max,100W Max, 150W Max)
- Power Factor: >0.9
- Total Harmonic Distortion (THD): <10%
- Operating Temperature: -40°F to 113°F (-40°C to 45°C)

LIGHTING DATA

- Lumens: 5000 to 21000
- Lumens Per Watt: 140 lm/W
- Correlated Color Temperature (CCT): 3-CCT (30K, 40K, 50K)
- Dimmable: 0-10V
- Color Rendering Index (CRI): >70
- L70: 50000 hours

ORDERING INFORMATION

Model	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions
C1-PT-60W-MTCP	(36W, 48W, 60W)	120-277V	0.33A@120V, 0.14A@277V 0.44A@120V, 0.19A@277V 0.55A@120V, 0.24A@277V	5000 6720 8400	140 lm/W	(3000K, 4000K, 5000K)	0-10V	Black	ø17.72"C x 24.80"H
C1-PT-80W-MTCP	(48W, 60W, 80W)	120-277V	0.44A@120V, 0.19A@277V 0.55A@120V, 0.24A@277V 0.74A@120V, 0.32A@277V	6720 8400 11200	140 lm/W	(3000K, 4000K, 5000K)	0-10V	Black	ø17.72"C x 24.80"H
C1-PT-100W-MTCP	(60W, 80W, 100W)	120-277V	0.55A@120V, 0.24A@277V 0.74A@120V, 0.32A@277V 0.92A@120V, 0.40A@277V	8400 11200 14000	140 lm/W	(3000K, 4000K, 5000K)	0-10V	Black	ø17.72"C x 24.80"H
C1-PT-150W-MTCP	(100W, 120W, 150W)	120-277V	0.92A@120V, 0.40A@277V 1.11A@120V, 0.48A@277V 1.38A@120V, 0.60A@277V	14000 16800 21000	140 lm/W	(3000K, 4000K, 5000K)	0-10V	Black	ø17.72"C x 24.80"H

PHYSICAL DIMENSIONS

All Models

ø17.72"C x 24.80"H

