

LED Full Cutoff Wall Pack

3-Wattages + 3-CCT (30/40/50K), Wet Rated, 130 lm/W, Dimmable + Smart

FEATURES	
Lumen Output	5200 to 15600 lumens
Efficacy	130 lm/W
Input Voltage	120-277V
Dimmable	0-10V Continuous
CCT	Select (3000K, 4000K, 5000K)
Rating	Wet Location
Warranty	5 Years

APPLICATIONS
Premium outdoor luminaire suitable for wall mounting on building exteriors for entrances, courtyards, alleys, and pedestrian walkways.

CONSTRUCTION
Manufactured for weather-proof durability using solid heavy duty die cast aluminum housing with anti-UV polyester coating to resist water, salt, corrosion, discoloration, and scratching. Wet Location rated.

ELECTRICAL
Input voltages 120-277V models with 0-10V Continuous Dimming. Tunable 3-CCT (3000K, 4000K, 5000K) and Tunable 3-Wattages. Operating temperatures -4°F to 113°F (-20°C to 45°C).

MOUNTING
Wall mounted installations.


OPTICS
Anti-UV Clear Polycarbonate Lens.

CONTROLS
Includes fixture integrated Photocell sensor.


LISTINGS
UL listed, FCC & RoHS compliant.

WARRANTY
5 year exclusive limited warranty.

Tunable 80W Max, 100W Max and 120W Max Models include Photocell Sensor

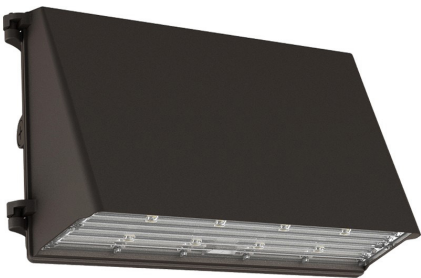

TUNABLE CORRELATED COLOR TEMPERATURES (CCT)

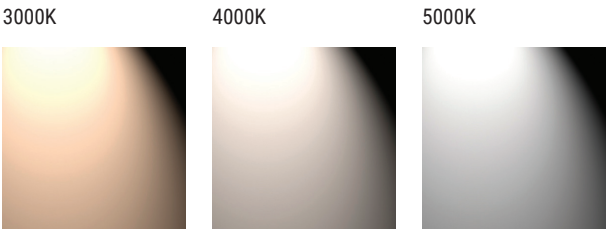

SPECIFICATIONS

ENERGY DATA

Input Voltage: 120-277V

Input Frequency: 50/60 Hz

Wattage: 3-Wattages (80W Max, 100W Max, 120W Max)

Power Factor: >0.9

Total Harmonic Distortion (THD): <20%

Operating Temperature: -4°F to 113°F (-20°C to 45°C)

LIGHTING DATA

Lumens: 5200 to 15600

Lumens Per Watt: 130 lm/W

Correlated Color Temperature (CCT): 3-CCT (30K, 40K, 50K)

Dimmable: 0-10V

Color Rendering Index (CRI): >70

L70: 50000 hours

ORDERING INFORMATION

Model	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions
FCWP-80/60/40W-LV-3CCT	(40W	120-277V	0.37A@120V, 0.16A@277V	5200	130 lm/W	(3000K, 4000K, 5000K)	0-10V	Bronze	14.24"L x 6.60"W x 9.27"H
	60W		0.55A@120V, 0.24A@277V	7800					
	80W)		0.73A@120V, 0.32A@277V	10400					
FCWP-100/80/60W-LV-3CCT	(60W	120-277V	0.55A@120V, 0.24A@277V	7800	130 lm/W	(3000K, 4000K, 5000K)	0-10V	Bronze	14.24"L x 6.60"W x 9.27"H
	80W		0.73A@120V, 0.32A@277V	10400					
	100W)		0.92A@120V, 0.40A@277V	13000					
FCWP-120/100/80W-LV-3CCT	(80W	120-277V	0.73A@120V, 0.32A@277V	10400	130 lm/W	(3000K, 4000K, 5000K)	0-10V	Bronze	14.24"L x 6.60"W x 9.27"H
	100W		0.92A@120V, 0.40A@277V	13000					
	120W)		1.10A@120V, 0.48A@277V	15600					

PHYSICAL DIMENSIONS

All Models

14.24"L x 6.60"W x 9.27"H

