

LED MINI WALL PACK



FEATURES AND SPECIFICATIONS

Construction

- Housing: ADC12 Aluminum Die Casting
- Lens: Polycarbonate
- Easy to install and operate

Electrical

- High efficacy up to 140lm/W
- AC120-277V, 0-10V dimming
- CCT & Wattage Selectable
- Surge Protection: L/N 2KV, L/N-P 2KV
- Waterproof: IP65 rated

Applications

- Security lighting, Entryways, Stairwells, Hallways, Outdoor commercial, Outdoor residential


Installation

- Photocell dusk to dawn function available


Warranty

- 5 years warranty


Specs at a Glance		* Nominal Wattage (Switchable)	
Configuration	MNWP-15/12/8W-LV	MNWP-30/20/15W-LV	MNWP-30/20/15W-LV-3CCT
Input Voltage	AC120-277V	AC120-277V	AC120-277V
Wattage (W)*	15W/12W/8W wattage adjustable	30W/20W/15W wattage adjustable	30W/20W/15W wattage adjustable
Lumens (lm)	max.2100 LM lm	max.4200lm	max.3900lm
Ecacy (LPW)	Up to 140lm/w		Up to 130lm/w
CCT (K)	Single CCT 3000K-6500K		3000K/4000K/5000K Tunable
CRI	>80		
Operating Temp	-40°C-50°C		
Certification	ETL DLC Premium		
Warranty	5 year limited warranty		

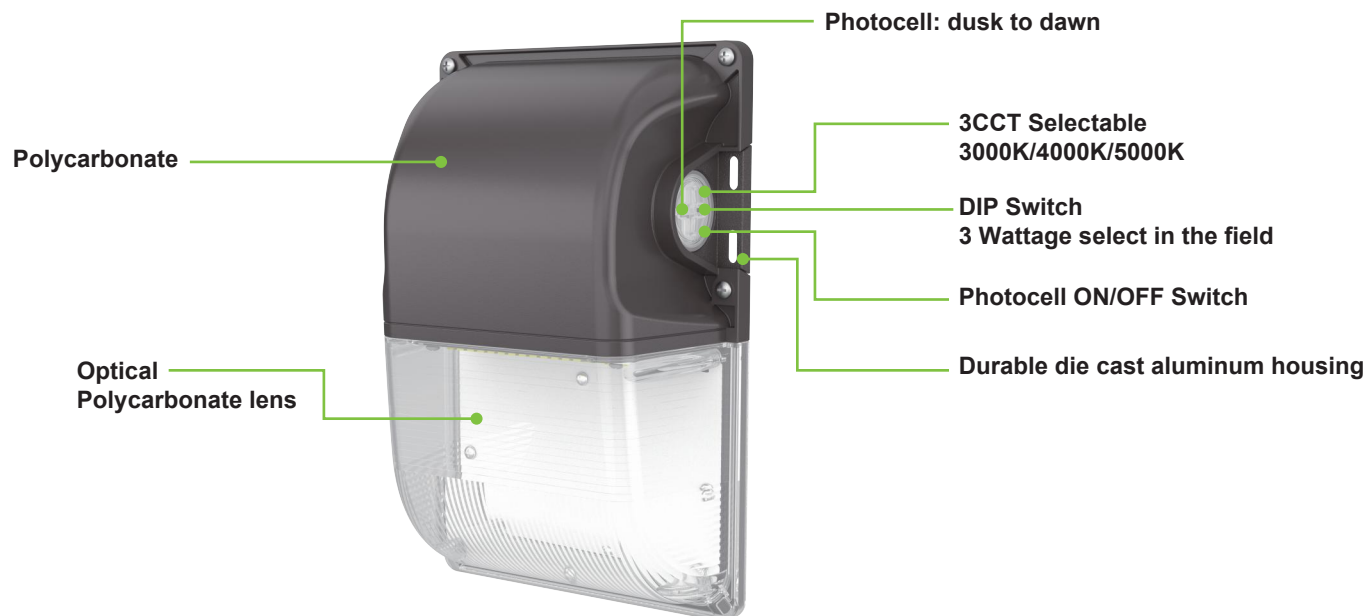

Dimensions

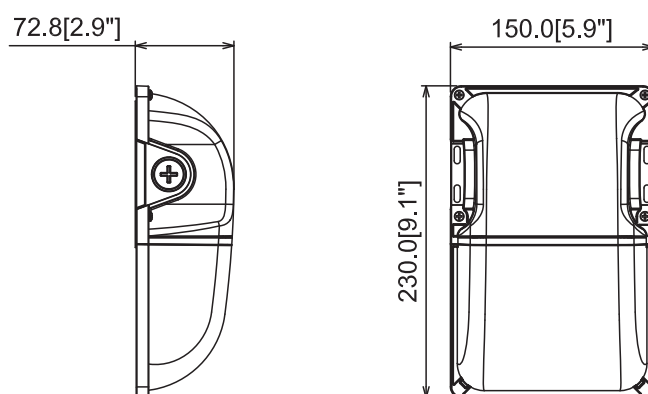

PHOTOMETRICS

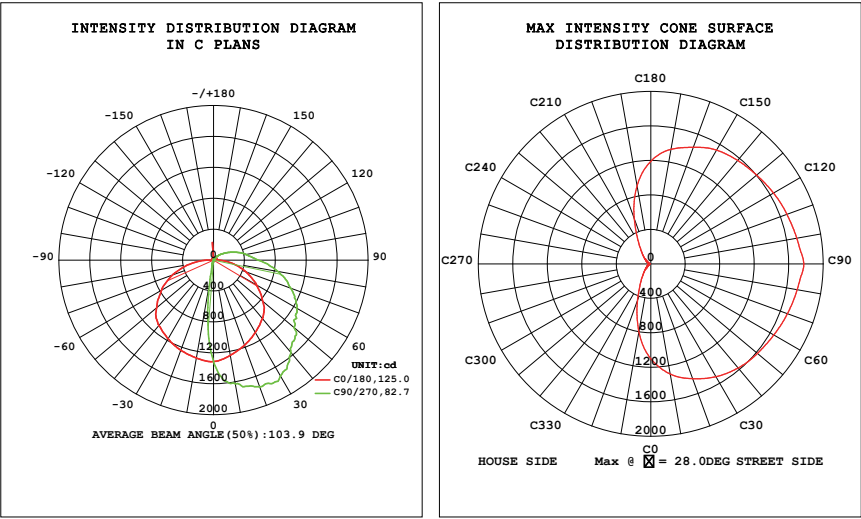

Packing/Weight

Part NO.	Outer Carton Size	Qty/Carton (pcs)	Net weight (lbs)	Gross weight (lbs)
All Model	20.1 x 13.8 x 11.8 inches	12	17.9 lbs	20.5 lbs