

LED Adjustable Cutoff Wall Pack

3-Wattages + 3-CCT (30/40/50K), Wet Rated, 130 lm/W, Dimmable + Smart

FEATURES

Lumen Output	10400 to 15600 lumens
Efficacy	130 lm/W
Input Voltage	120-277V
Dimmable	0-10V Continuous
CCT	Select (3000K/4000K/5000K)
Rating	Wet Location
Warranty	5 Years

APPLICATIONS

Premium outdoor luminaire suitable for wall mounting on building exteriors for entrances, courtyards, alleys, and pedestrian walkways.

CONSTRUCTION

Manufactured for weather-proof durability using solid heavy duty die cast aluminum housing with anti-UV polyester coating to resist water, salt, corrosion, discoloration, and scratching. Wet Location rated.

ELECTRICAL

Input voltages 120-277V models with 0-10V Continuous Dimming. Tunable 3-CCT (3000K, 4000K, 5000K) and Tunable 3-Wattages. Operating temperatures -40°F to 113°F (-40°C to 45°C).

MOUNTING

Wall mounted installations.

OPTICS

Anti-UV Clear Prismatic Tempered Glass Lens.

CONTROLS

Installed fixture integrated Photocell sensor available.

LISTINGS

DLC Premium listed. UL certified to meet US and Canadian standards. FCC and RoHS compliant.


WARRANTY

5 year exclusive limited warranty.

3-Wattage and 3-CCT Models



TUNABLE CORRELATED COLOR TEMPERATURES (CCT)

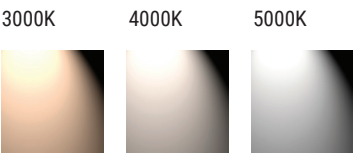

SPECIFICATIONS

ENERGY DATA

Input Voltage: 120-277V
Input Frequency: 50/60 Hz
Wattage: 3-Wattages (120W Max)
Power Factor: >0.9
Total Harmonic Distortion (THD): <15%
Operating Temperature: -40°F to 113°F (-40°C to 45°C)

LIGHTING DATA

Lumens: 5200 to 10400
Lumens Per Watt: 130 lm/W
Correlated Color Temperature (CCT): 3-CCT (30K, 40K, 50K)
Dimmable: 0-10V
Color Rendering Index (CRI): >70
L70: 50000 hours

ORDERING INFORMATION

Model	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions
ACWP-120/100/80W-LV-3CCT	80W	120-277V	0.73A@120V, 0.32A@277V	10400	130 lm/W	(3000K, 4000K, 5000K)	0-10V	Bronze	14.21"L x 9.27"W x 7.31"D
	100W		0.92A@120V, 0.40A@277V	13000					
	120W		1.10A@120V, 0.48A@277V	15600					

Control

PCB [INSTALLED] Integrated Photocell Sensor

PHYSICAL DIMENSIONS

All Models

14.21"L x 9.27"W x 7.31"D

