

LED Round High Bay

3-Wattages + 3-CCT (35/40/50K), Wet Rated, 150 lm/W, Dimmable + Smart

FEATURES	
Lumen Output	15000 to 36000 lumens
Efficacy	150 lm/W
Input Voltage	120-277V or 277-480V
Dimmable	0-10V Continuous
CCT	Select (3500K, 4000K, 5000K)
Rating	Wet Location
Warranty	5 Years

APPLICATIONS

Premium indoor luminaire for hanging or pendant mounting in high ceiling spaces above 25 feet. Suitable for gymnasiums, warehouses, manufacturing, packaging, storage, aisles, and covered decks.

CONSTRUCTION

Manufactured for durability using solid heavy duty die cast aluminum housing with anti-UV polyester coating to resist water, corrosion, discoloration, and scratching. Wet Location rated.

ELECTRICAL

Input voltages 120-277V or 277-480V models with 0-10V Continuous Dimming. Tunable 3-CCT (3500K, 4000K, 5000K) and Tunable 3-Wattages. Operating temperatures -40°F to 113°F (-40°C to 45°C).

MOUNTING

Steel Hook Mount for hanging and integrated 6-FT cord standard. Optional adjustable Yoke Mount for surface mounting available.

OPTICS

Anti-UV Clear Ridged Polycarbonate Lens with 90 degree beam angle standard. 90 degree Aluminum and Prismatic Polycarbonate Reflectors available. Glare Shield Polycarbonate Drop Lens available.

CONTROLS

Installed fixture mounted PIR or Microwave Sensor with Daylight Priority. Remote Control or Bluetooth App Control options available.

EMERGENCY

Installed 90 Minute Emergency Backup Battery Driver available.

LISTINGS

DLC Premium pending. UL certified to meet US and Canadian standards. FCC and RoHS compliant.

WARRANTY

5 year exclusive limited warranty.



Hook Mount



PIR Sensor or Bluetooth



Remote Control




Microwave Sensor or Bluetooth



Emergency Driver



TUNABLE CORRELATED COLOR TEMPERATURES (CCT)

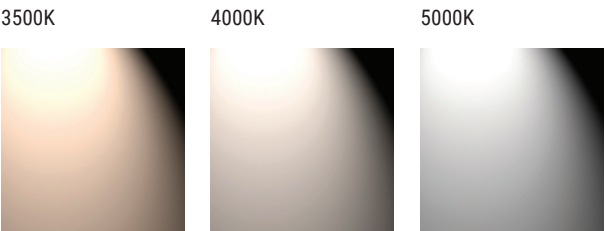

SPECIFICATIONS

ENERGY DATA

Input Voltage: 120-277V, 277-480V

Input Frequency: 50/60 Hz

Wattage: 3-Wattages (150W Max, 240W Max)

Power Factor: >0.9

Total Harmonic Distortion (THD): 10%

Operating Temperature: -40°F to 113°F (-40°C to 45°C)

LIGHTING DATA

Lumens: 15000 to 36000

Lumens Per Watt: 150 lm/W

Correlated Color Temperature (CCT): 3-CCT (35K, 40K, 50K)

Dimmable: 0-10V

Color Rendering Index (CRI): >70

L70: 50000 hours

ORDERING INFORMATION

Model	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions
UFO-G15-150/120/100-LV-3CCT	(100W, 120W, 150W)	120-277V	0.92A@120V, 0.40A@277V 1.10A@120V, 0.48A@277V 1.38A@120V, 0.60A@277V	15000 18000 22500	150 lm/W	(3500K, 4000K, 5000K)	0-10V	Black	ø10.23"C x 7.24"H
UFO-G15-240/200/150-LV-3CCT	(150W, 200W, 240W)	120-277V	1.38A@120V, 0.60A@277V 1.83A@120V, 0.79A@277V 2.20A@120V, 0.95A@277V	22500 30000 36000	150 lm/W	(3500K, 4000K, 5000K)	0-10V	Black	ø11.04"C x 8.08"H
UFO-G15-150/120/100-HV-3CCT	(100W, 120W, 150W)	277-480V	0.40A@277V, 0.23A@480V 0.48A@277V, 0.28A@480V 0.60A@277V, 0.35A@480V	15000 18000 22500	150 lm/W	(3500K, 4000K, 5000K)	0-10V	Black	ø10.23"C x 7.24"H
UFO-G15-240/200/150-HV-3CCT	(150W, 200W, 240W)	277-480V	0.60A@277V, 0.35A@480V 0.79A@277V, 0.46A@480V 0.95A@277V, 0.55A@480V	22500 30000 36000	150 lm/W	(3500K, 4000K, 5000K)	0-10V	Black	ø11.04"C x 8.08"H

Control and accessories

ANT-6-4T	12V DC PIR Bi-Level Daylight High Bay Audio Jack Smart Sensor	EM30R (BLD-RM30D)	Emergency Backup LED Driver, 30W, 90-Min Battery
ANT-5-4T	12V DC MW Bi-Level Daylight High Bay Audio Jack Smart Sensor	UFOG15-ALRF-150W	90deg Aluminum Reflector 150W max
ANT-6-4T-BLE-GE	12V DC PIR Bi-Level Daylight High Bay Audio Jack Smart Sensor for Bluetooth App Control	UFOG15-ALRF-240W	90deg Aluminum Reflector 240W max
ANT-5-4T-BLE-GE	12V DC MV Bi-Level Daylight High Bay Audio Jack Smart Sensor for Bluetooth App Control	UFOG15-PCRF-150W	90deg PC Reflector 150W max
RC-100	Sensor Remote Control	UFOG15-PCRF-250W	90deg PC Reflector 240W max
UFOG15-WG-150W	Wire Guard 150W Max	UFOG15-PCBL-150W	Anti-glare Bottom Lens 150W Max
UFOG15-WG-240W	Wire Guard 240W Max	UFOG15-PCBL-240W	Anti-glare Bottom Lens 240W Max
UFOG15-YM-150W	Yoke Mount 150W Max		
UFOG15-YM-240W	Yoke Mount 240W Max		

PHYSICAL DIMENSIONS

150W Max Models

ø10.23"C x 7.24"H

240W Max Models

ø11.04"C x 8.08"H

