

P5 LED Area Light

LED AREA LIGHT



FEATURES AND SPECIFICATIONS

Construction

- Die-cast Aluminum housing with powder coat finish.
- UV Stabilized polycarbonate lens.
- Easy to install and operate

Electrical

- Lumileds Chips, 140lm/w.
- Sosen Led Driver , AC120-277V,0-10V dimming
- Surge Protection: 10KV
- CCT & Wattage Selectable
- Light Distribution: Type III
- Waterproof : IP65 rated

Applications

- Parking Lots, Factories, Playgrounds, Retail Centers, Walkways, Warehouses

Installation

- Slip-fitter/Trunnion/Yoke/Adjustable Arm Mount/Arm Mount

Warranty


- 5 years warranty

Specs at a Glance		* Nominal Wattage (Switchable)
Configuration	P5-SB-150/120/100W-LV-3CCT P5-SB-150/120/100W-HV-3CCT	P5-SB-300/240/200W-LV-3CCT P5-SB-300/240/200W-HV-3CCT
CCT (K)	3000K 4000K 5000K Tunable	
Wattage (W)*	100W/120W/150W wattage adjustable	200W/240W/300W wattage adjustable
Lumens (lm)	max.21000lm	max.42000lm
Efficacy (LPW)	Up to 140lm/w	
CRI	>80	
Input Voltage	120-277V 277-480V	
Operating Temp	-40°C-50°C	
Certification	UL DLC Premium	
Warranty	5 year limited warranty	


P5 LED Area Light



Dimensions

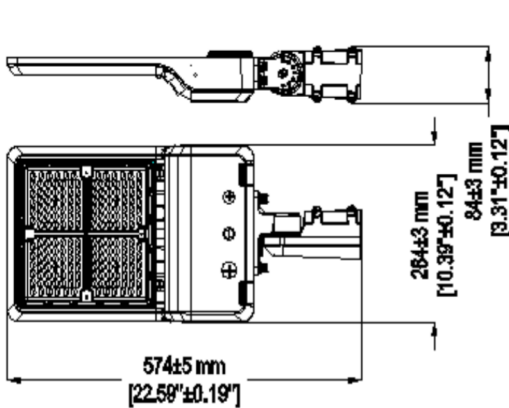

100W/120W/150W

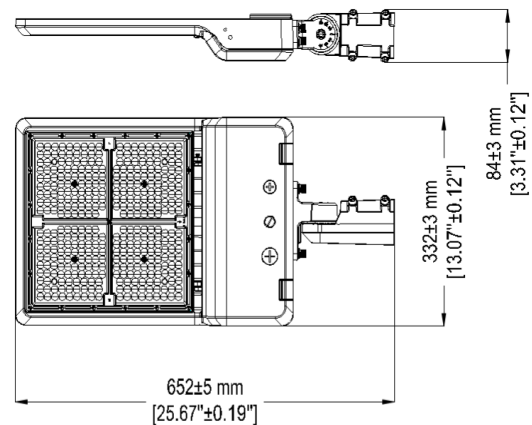

200W/240W/300W

P5 LED Area Light

Accessories



Type A
Slip-fitter



Type B
Adjustable arm mount
(Square/Round pole)





Type C
Trunnion



Photocell sensor

PHOTOMETRICS

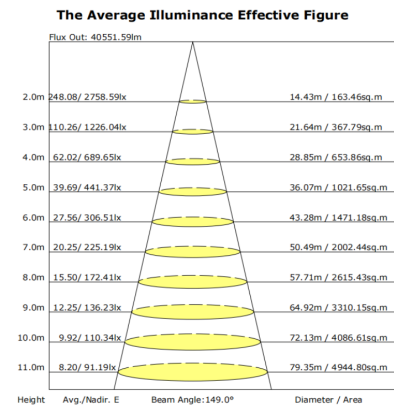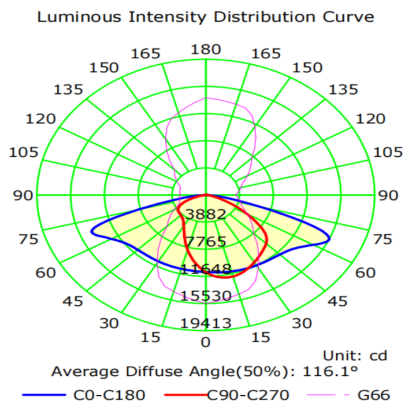

Packing/Weight

Part NO.	Outer Carton Size (L×W×H)	Qty/Carton (pcs)	Net weight (lbs)	Gross weight (lbs)
150W	21.6 × 12.6 × 5.9 inches	1	10.3 lbs	11.3 lbs
300W	24.8 × 14.96 × 5.91 inches	1	12.5lbs	13.6 lbs

