

LED Bollard Light

3-Wattages + 3-CCT (30/40/50K), Wet Rated, 140 lm/W, Dimmable + Smart

FEATURES	
Lumen Output	1960 to 4200 lumens
Efficacy	140 lm/W
Input Voltage	120-277V, 120-347V
Dimmable	0-10V
CCT	Select (3000K, 4000K, 5000K)
Rating	Wet Location
Warranty	5 Years

APPLICATIONS

Premium outdoor luminaire suitable for entrances and walkways.

CONSTRUCTION

Manufactured for durability using die-cast aluminum housing with UV resistant powder coating to resist water, salt, corrosion, discoloration, and scratching. Wet Location rated.

ELECTRICAL

Input voltages 120-277VAC, 120-347VAC models with 0-10V Continuous Dimming. Tunable 3-CCT (3000K, 4000K, 5000K) and Tunable 3-Wattages. Operating temperatures -40°F to 113°F (-40°C to 45°C).

MOUNTING

Ground installation standard.

OPTICS

Anti-UV Clear Polycarbonate Lens specially designed Cone Reflector or Internal Louver Lens.

EMERGENCY

Emergency Backup Battery Driver options available.

LISTINGS


DLC Premium listed. UL certified to meet US and Canadian standards. FCC and RoHS compliant.

WARRANTY

5 year exclusive limited warranty.



Tuning Switches on Light Housing




Square Housing Ground Anchors

Cylinder Housing Ground Anchors



CORRELATED COLOR TEMPERATURES (CCT)

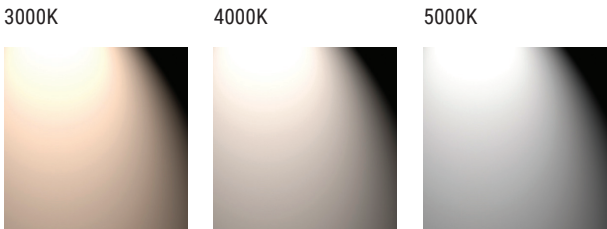

SPECIFICATIONS

ENERGY DATA

Input Voltage: 120-277V, 120-347V

Input Frequency: 50/60 Hz

Wattage: 3-Wattages (14W 19W 24W)

Power Factor: >0.9

Total Harmonic Distortion (THD): <20%

Operating Temperature: -40°F to 113°F (-40°C to 45°C)

LIGHTING DATA

Lumens: 1960 to 3360

Lumens Per Watt: 140 lm/W

Correlated Color Temperature (CCT): 3-CCT (30K, 40K, 50K)

Dimmable: 0-10V

Color Rendering Index (CRI): >70

L70: 50000 hours

ORDERING INFORMATION


Model	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions
BD01-24W-MTCP	(14W 19W 24W)	120-277V 120-347V	0.13A@120V, 0.06A@277V, 0.04A@347V 0.13A@120V, 0.06A@277V, 0.04A@347V 0.13A@120V, 0.06A@277V, 0.04A@347V	1960 2660 3360	140 lm/W	(3000K, 4000K, 5000K)	0-10V	Bronze	40.96"L x 6.35"W x 6.35"D
BD02-24W-MTCP	(14W 19W 24W)	120-277V 120-347V	0.13A@120V, 0.06A@277V, 0.04A@347V 0.13A@120V, 0.06A@277V, 0.04A@347V 0.13A@120V, 0.06A@277V, 0.04A@347V	1960 2660 3360	140 lm/W	(3000K, 4000K, 5000K)	0-10V	Bronze	Ø 6.39"C x 42.24"H
BD03-24W-MTCP	(14W 19W 24W)	120-277V 120-347V	0.13A@120V, 0.06A@277V, 0.04A@347V 0.13A@120V, 0.06A@277V, 0.04A@347V 0.13A@120V, 0.06A@277V, 0.04A@347V	1960 2660 3360	140 lm/W	(3000K, 4000K, 5000K)	0-10V	Bronze	Ø 6.39"C x 40.98"H
BD04-24W-MTCP	(14W 19W 24W))	120-277V 120-347V	0.13A@120V, 0.06A@277V, 0.04A@347V 0.13A@120V, 0.06A@277V, 0.04A@347V 0.13A@120V, 0.06A@277V, 0.04A@347V	1960 2660 3360	140 lm/W	(3000K, 4000K, 5000K)	0-10V	Bronze	Ø 6.39"C x 42.24"H
BD05-24W-MTCP	(14W 19W 24W)	120-277V 120-347V	0.13A@120V, 0.06A@277V, 0.04A@347V 0.13A@120V, 0.06A@277V, 0.04A@347V 0.13A@120V, 0.06A@277V, 0.04A@347V	1960 2660 3360	140 lm/W	(3000K, 4000K, 5000K)	0-10V	Bronze	Ø 6.39"C x 40.98"H
BD06-24W-MTCP	(14W 19W 24W)	120-277V 120-347V	0.13A@120V, 0.06A@277V, 0.04A@347V 0.13A@120V, 0.06A@277V, 0.04A@347V 0.13A@120V, 0.06A@277V, 0.04A@347V	1960 2660 3360	140 lm/W	(3000K, 4000K, 5000K)	0-10V	Bronze	Ø 9.80"C x 41.65"H



PHYSICAL DIMENSIONS


BD01-24W-MTCP

40.96"L x 6.35"W x 6.35"D




BD02-24W-MTCP

Ø 6.39"C x 42.24"H




BD03-24W-MTCP

Ø 6.39"C x 40.98"H




BD04-24W-MTCP

Ø 6.39"C x 42.24"H



BD05-24W-MTCP

Ø 6.39"C x 40.98"H



BD06-24W-MTCP

Ø 9.80"C x 41.65"H

